



WATER- AND DAMP DOSING UNITS

DOSING UNITS FOR WATER

- throughput with piston lifting 1 mm
at 1.0 bar 0.... 500 l / h, at 3.0 bar 0.... 2500 l / h
- throughput with piston lifting 2 mm
at 1.5 bar 0..... 1250 l / h, with 3.0 bar 0... 2500 l / h
- connection $\frac{3}{4}$ "
- ready-to-install assembled

By sensitive water lines and / or high throughput electro-pneumatically proportional regulating valves preferred

- size DN 15 - DN 50
- throughput at 3,0 bar from 1800 l / h to 15.500 l / h
- ready-to-install assembled




Water dosing unit with dosing valve
DEW 2500/1-2



Water dosing unit with electro-pneumatic valve
WDU - complete piping

DOSING UNITS FOR DAMP

- From DN 25 to DN 65 with electro-pneumatically proportional regulating valves for additions at 8 bar
- from 625 kg / h to 3750 kg / h
 - ready-to-install assembled

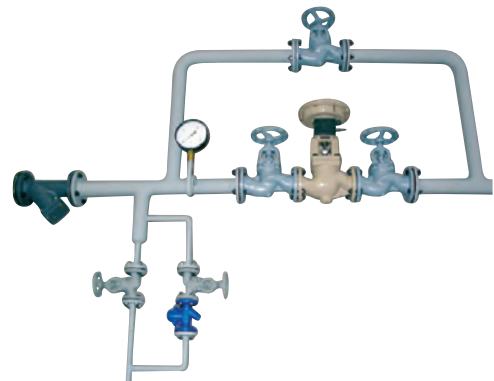

Steam dosing unit with electro-pneumatic valve
DDU - complete piping